

NAVIGATION LIGHTS

– Professional Series with
Complete Control & Monitoring System

luminell®
simply bright 



THE ULTIMATE NAVIGATION LIGHT


References from over 90.000 LED navigation lights produced, enables us to offer a better level of quality, better reliability, stronger service and installation flexibility than ever seen.

The Professional Series is:

- LED technology
- Up to 100.000 hours lifetime for an installation
- Full range for all vessel sizes and vessel types
- Fully waterproof, IP 68
- Completely vibration safe
- High quality components
- Worldwide approval – MED Wheelmarked
- 5 years warranty

Options:

- Ice class "defroster"
- Dimmable versions for NAVY & SAR

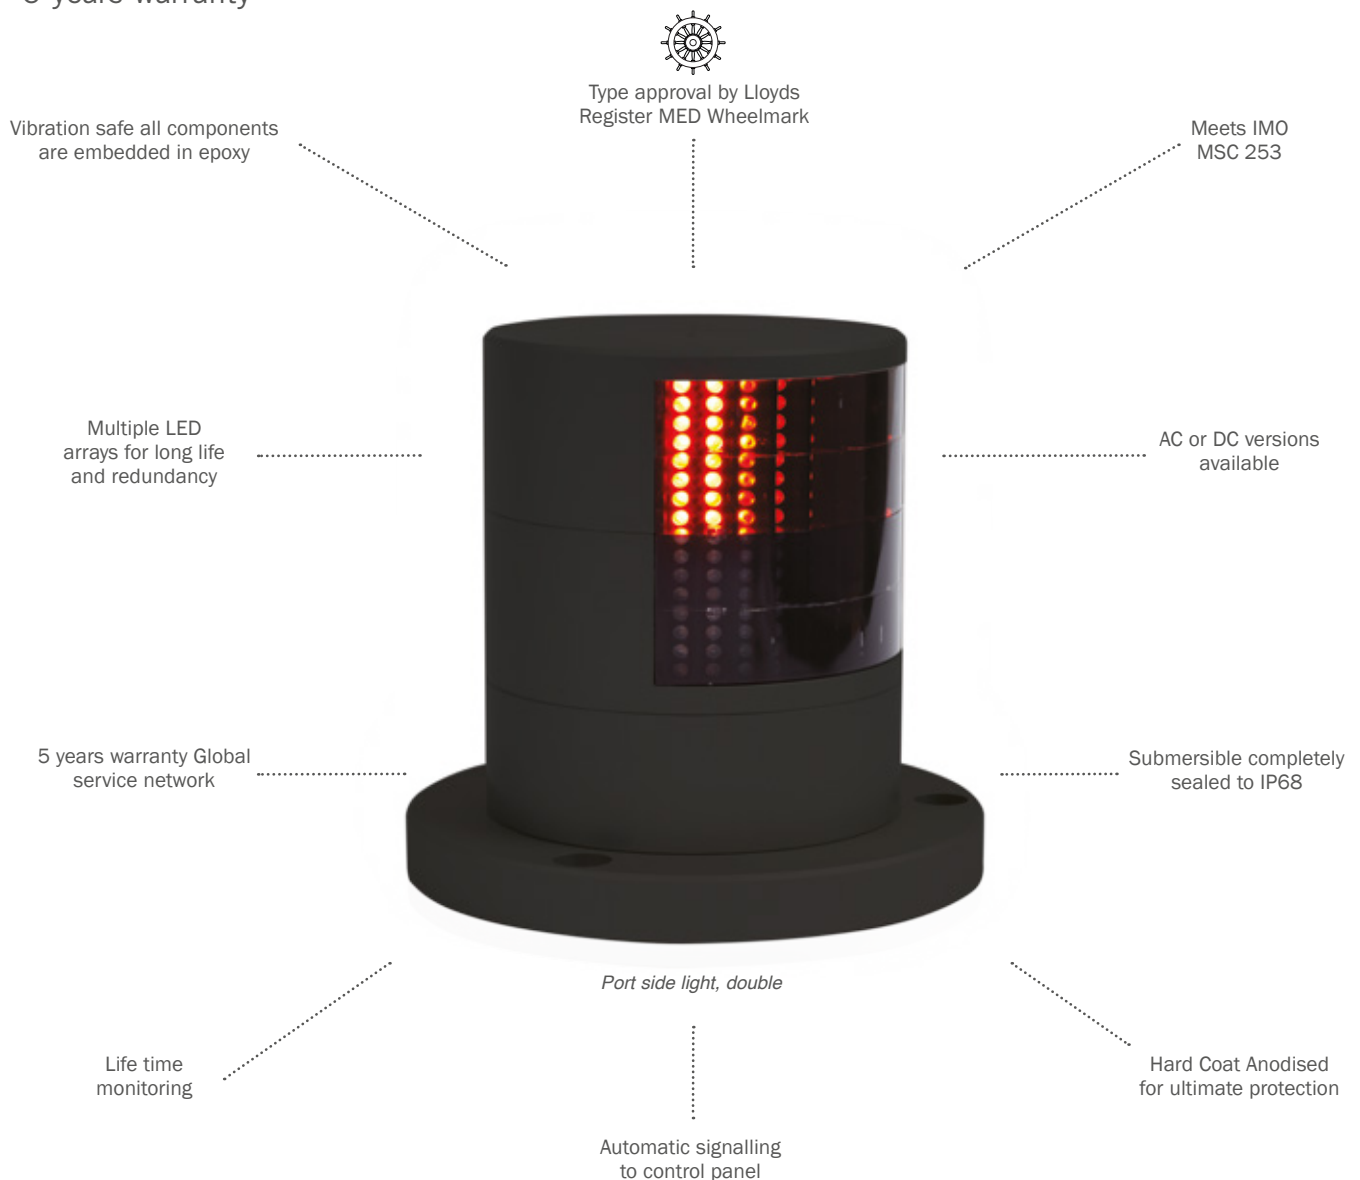

COMPLETE CONTROL & MONITORING SYSTEM

for our LED Navigation Lights

- Scalable for all vessel types and sizes
- Single or dual power supplies
- 230VAC, 115VAC and 24VDC versions
- Type approved IEC 60945
- Conforms to IMO MSC253
- Customized switch panel w/IP67 protection
- Compact form factor
- Interface to bridge systems
- Extra panel for double bridge vessels
- Automatic switch over functions
- Plug and play integration with all our Nav Lights

NAVIGATION LIGHT CONTROLLER

The brains in the system type approved Monitoring Relay

Manual control for each navigation light

One monitoring relay per navigation light



IP66 steel cabinet from Schneider

power coated grey RAL 7035

CONTROL PANEL

Hard coat anodized for ultimate protection

Text according to customer preference

Smaller versions available for fewer lights

4 group buttons, user configured

Pairing of lights, user configured



Recessed buttons for secure control

IP67 (front)

Compact form factor

Dimming control for panel and steering light

Prepared for NAVY/SAR dimmable lights


Each panel is customized, only showing lights on vessel

High quality type approved components used throughout


Up to 5 years warranty

SYSTEM OVERVIEW

CONTROL PANEL OPTIONAL SECONDARY

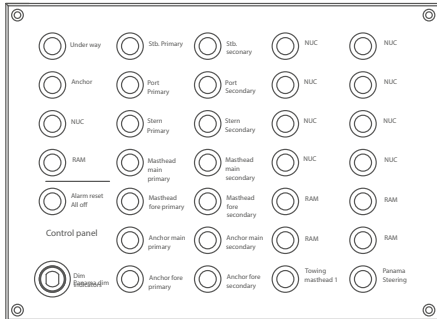


CONTROL PANEL

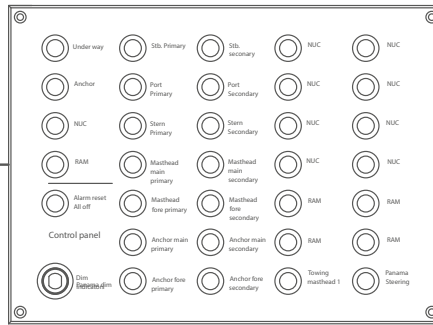

RS-485 Network
(Max 1000 meter)

NAVIGATION LIGHT CONTROLLER

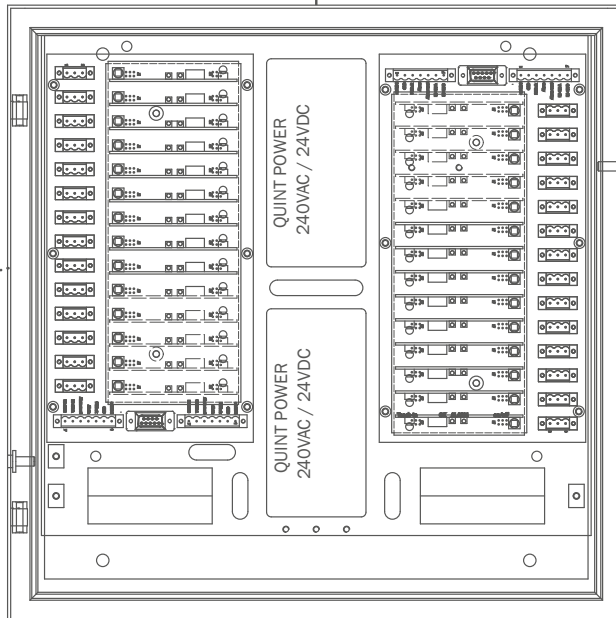

MANUAL CONTROL

Up to 28
Lopolights
per basic NLC

24VDC two-wire
cable to nav.
light

24VDC two-wire
cable to nav.
light

Ships primary
(100/ 240 VAC)

Ships Back-up
(24 VDC)

Specifications are subject to change at any point without prior notice.

luminell®
simply bright

Luminell AS
Myrabakken Næringsssenter – Bygg 2
6010 Ålesund
NORWAY

Contact
+47 70 10 10 70
General: info@luminell.com
Sales inquiries: sales@luminell.com

Org.nr 995 504 553

www.luminell.com

